




## HI-LITE MFG. CO., INC.

13450 Monte Vista Avenue  
Chino, California 91710  
Telephone: (909) 465-1999  
Toll Free: (800) 465-0211  
Fax: (909) 465-0907  
www.hilitemfg.com

### **Mounting Instructions for Cord Canopy**

1. Before installing fixture, disconnect power at main electrical box.
2. Trim wire from fixture to create a 6" pigtail.
3. Feed cord from fixture through bushing, canopy, threaded nipple and mounting strap.
4. Measure desired overall height from top of canopy to bottom of fixture.
5. Tie a pressure relief knot in cord above mounting strap, leaving enough cord below knot to achieve desired overall fixture height.
6. Position metal strain relief clamp around cord above pressure relief knot with flange facing canopy, then squeeze pliers to secure clamp in place.
7. Use wire nuts to connect fixture wires to outlet wires.
8. Use wire nuts to attach ground wire to junction box.
9. Attach mounting strap to junction box.
10. Screw nipple up onto canopy till snug with nut, slide canopy up cord till snug with mounting strap and secure with bushing.

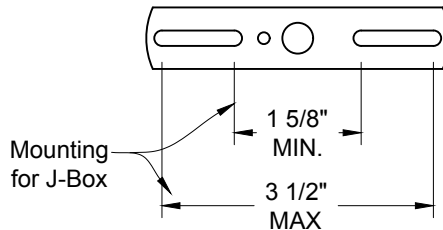

**TOP VIEW**

